

FIG.1

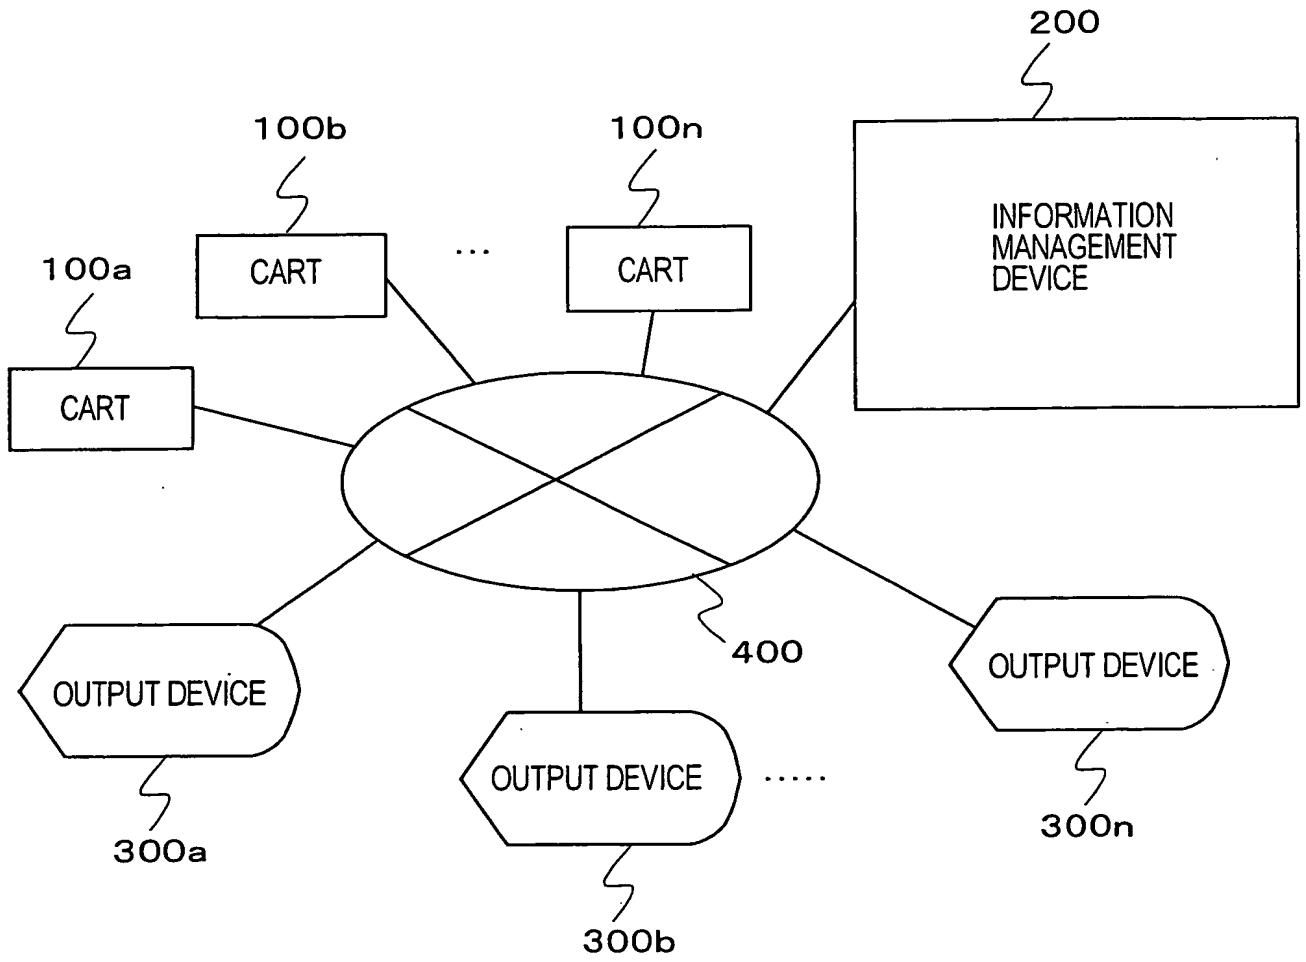


FIG. 2

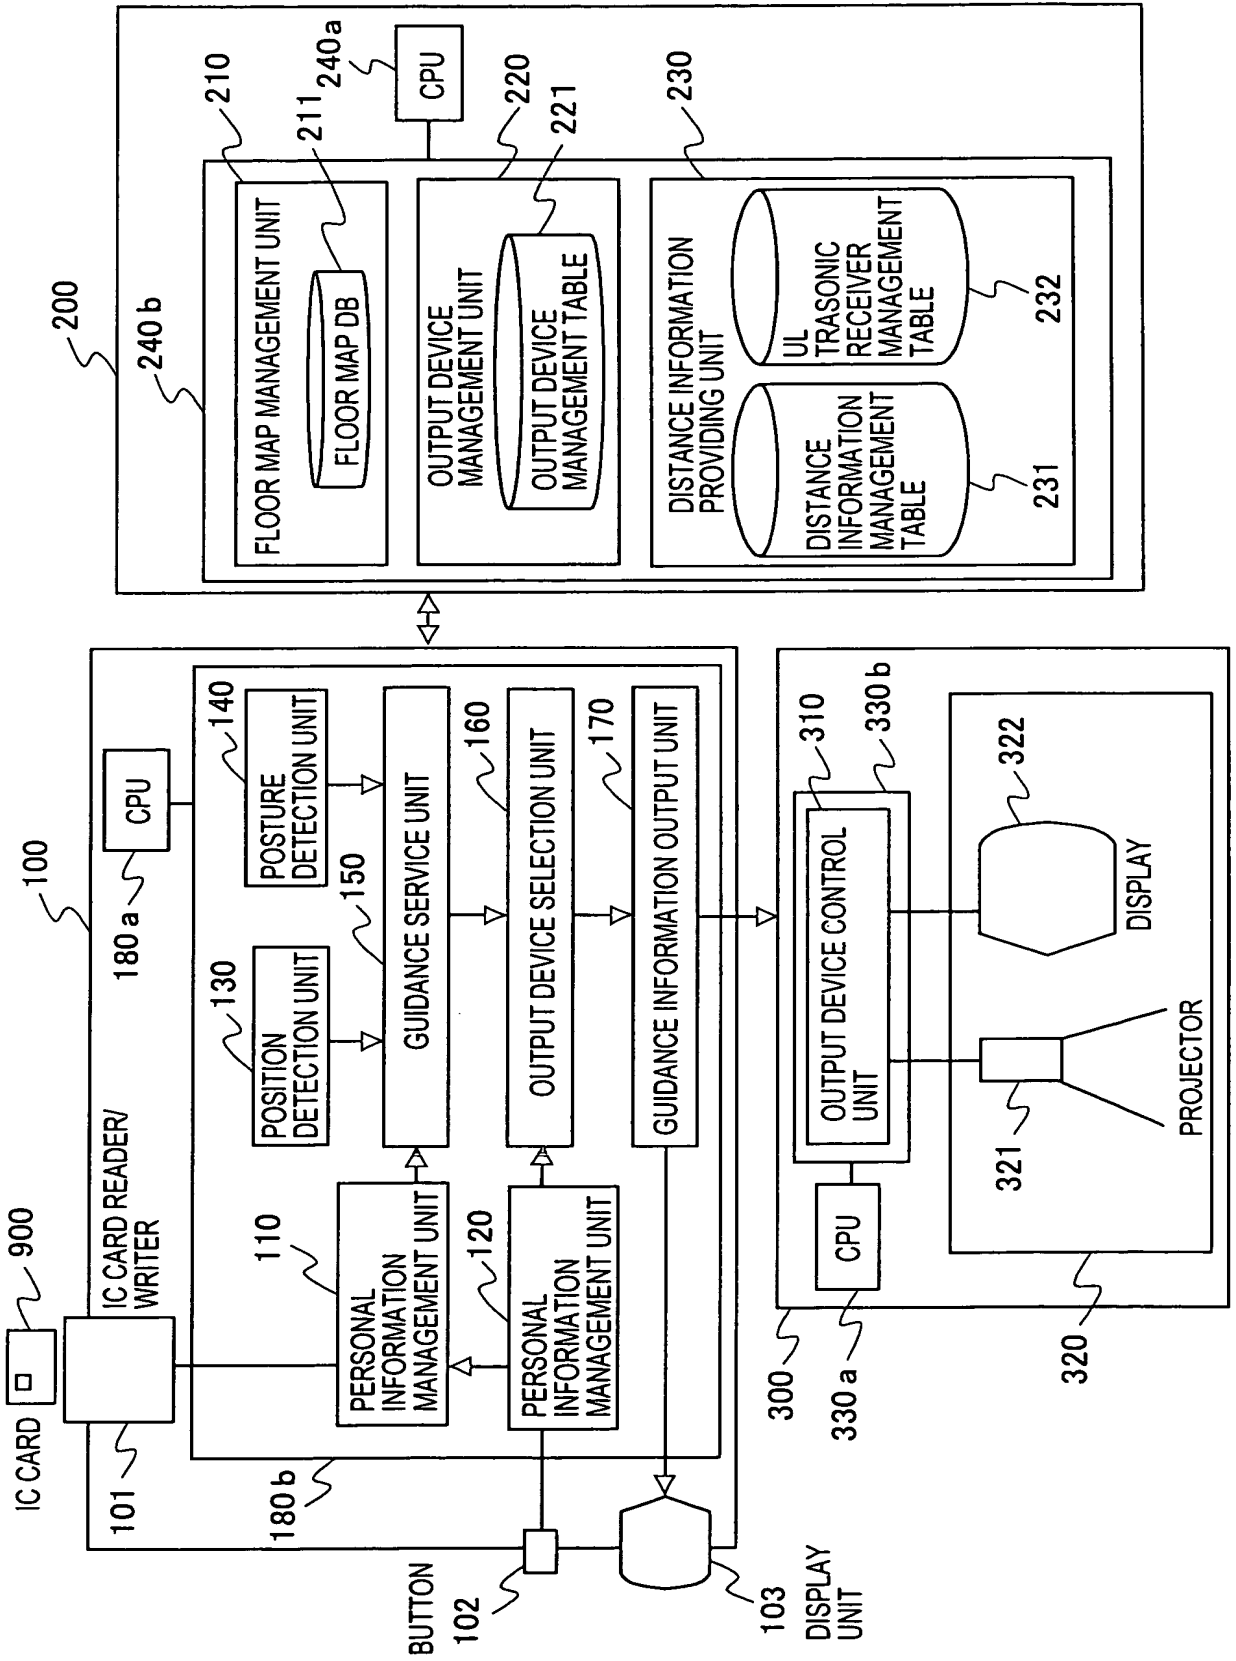


FIG.3

DESTINATION	PROCESSED
RECEPTION DESK	×
EMBARKATION CHECK DESK	
BOARDING GATE	
...	

FIG.4

221

801	802	803			804	805	806
DEVICE ID	DEVICE TYPE	INSTALLATION STATE			USE STATE	SELECTED COLOR	IP ADDRESS
		X	Y	DIRECTION e			
1	DISPLAY	2000	2000	(0,1,0)	VACANT	—	201.152.13.1
2	PROJECTOR	3000	2000	(0,0,1)	VACANT	—	201.152.13.2
3	PROJECTOR	2000	3000	(1,0,0)	IN USE	YELLOW	201.152.13.3
...							

FIG.5

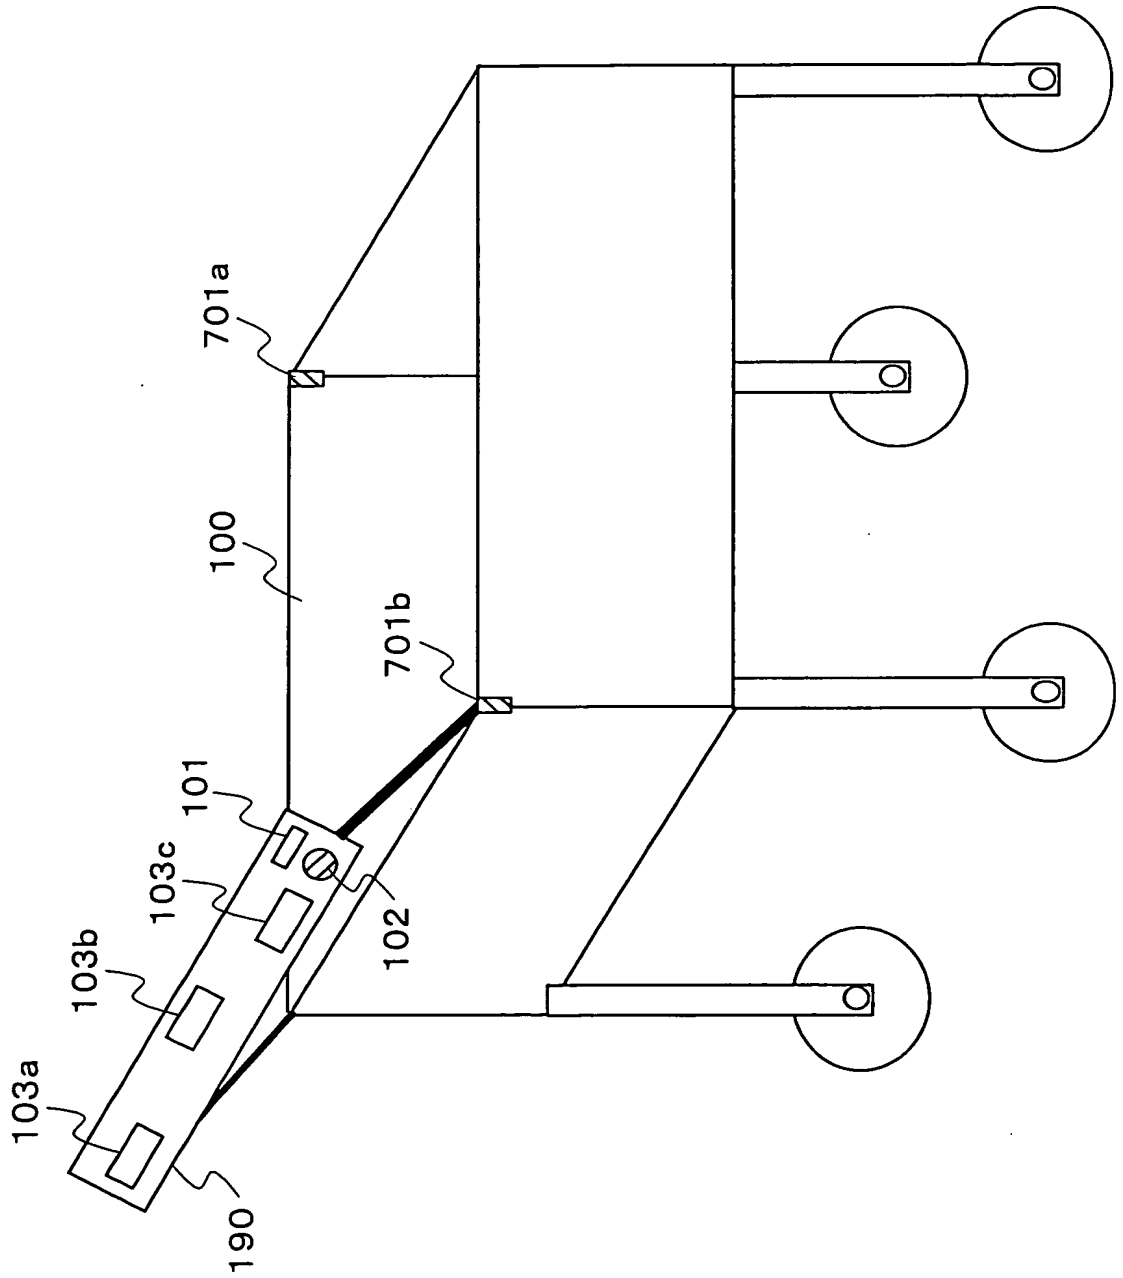


FIG.6

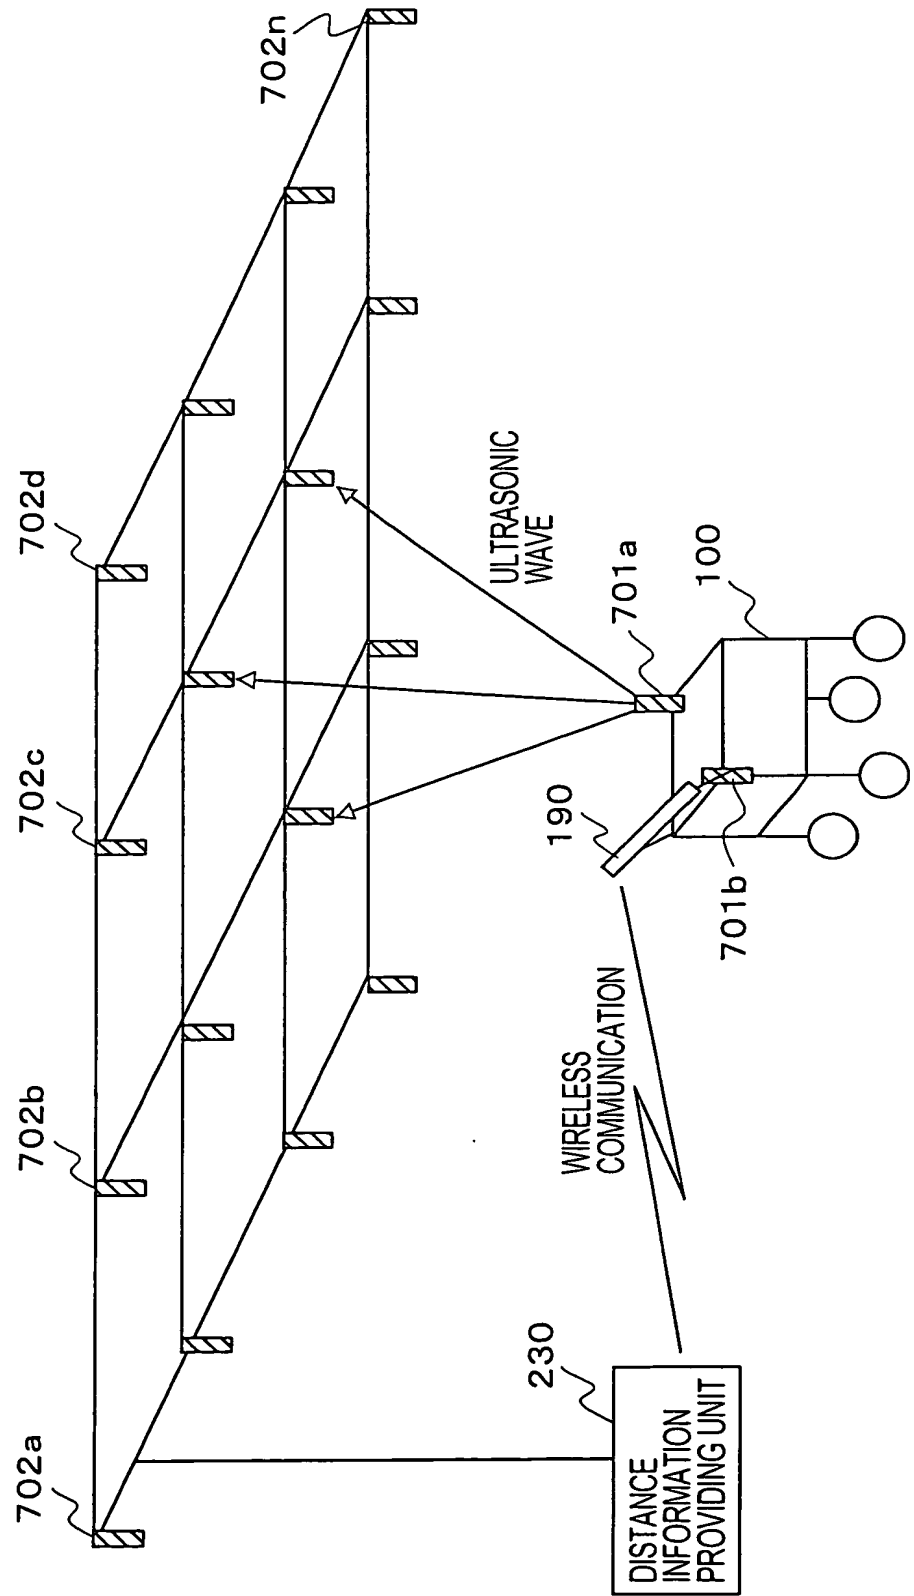


FIG.7

231

401	402	403	404	405	406	407	408
SERIAL NUMBER	OSCILLATOR ID	RECEIVER ID-A	MEASURED VALUE A	RECEIVER ID-B	MEASURED VALUE B	RECEIVER ID-C	MEASURED VALUE C
1	12345	23	6430	34	7100	24	7200
2	2468	17	5500	18	6450	35	6850
3	13579	18	4680	19	5890	42	7350
...

FIG.8

232

RECEIVER ID	POSITION		
	X	Y	Z
1	2000	2000	5000
2	3000	2000	5000
3	2000	3000	5000
...

FIG.9

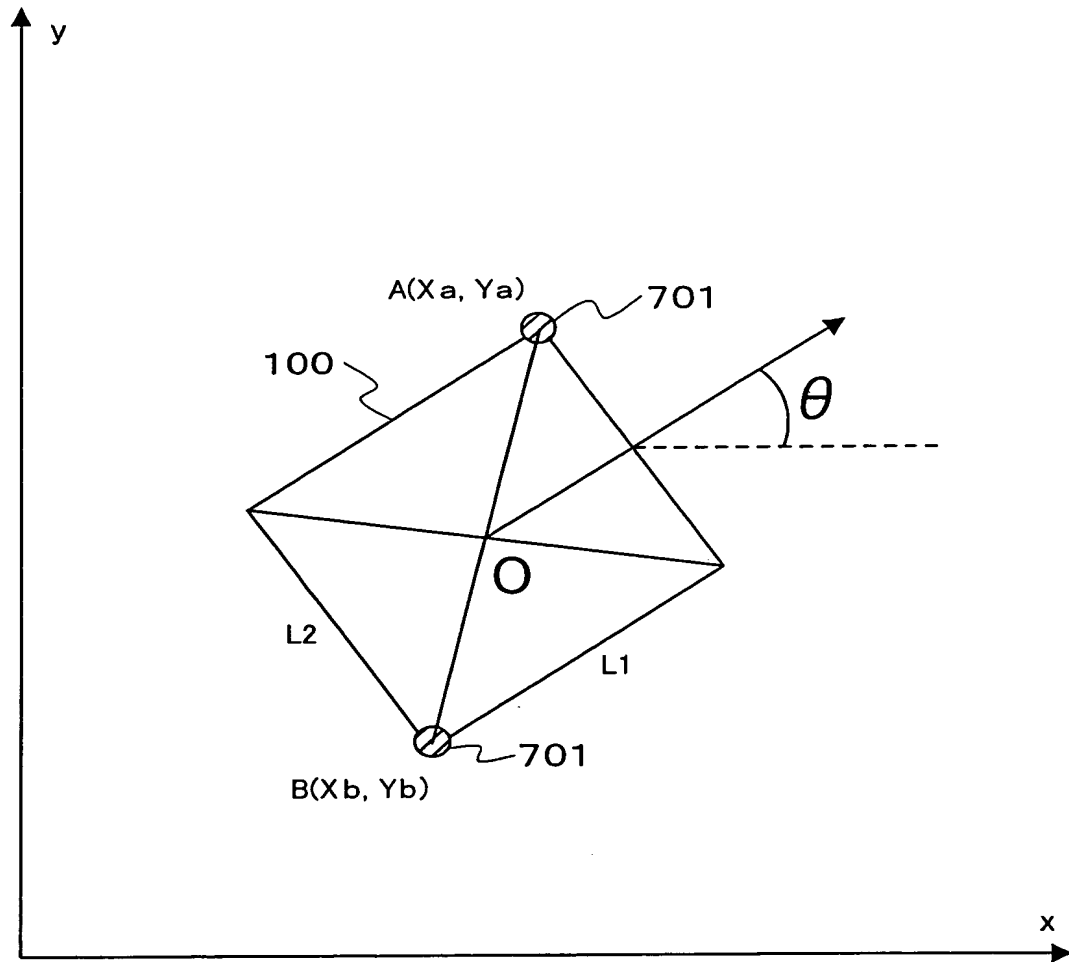


FIG.10

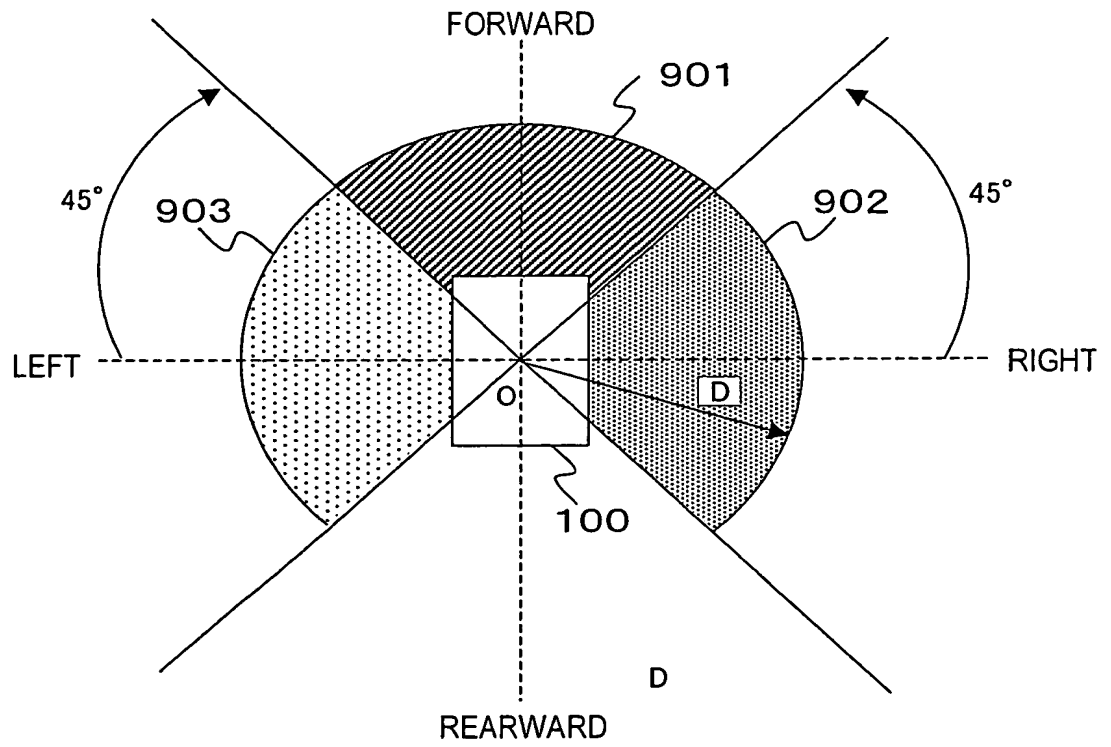


FIG.11

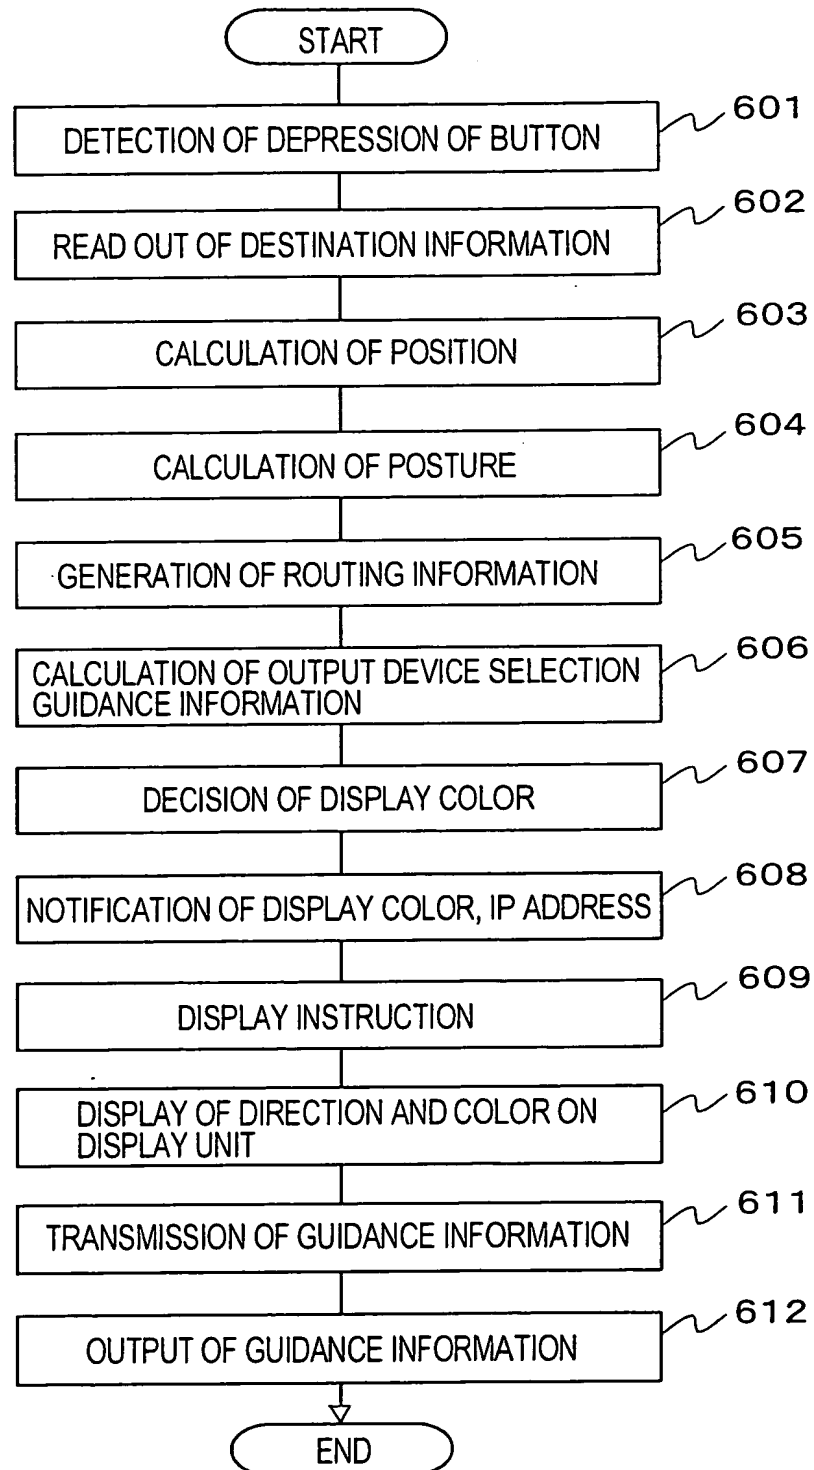


FIG.12

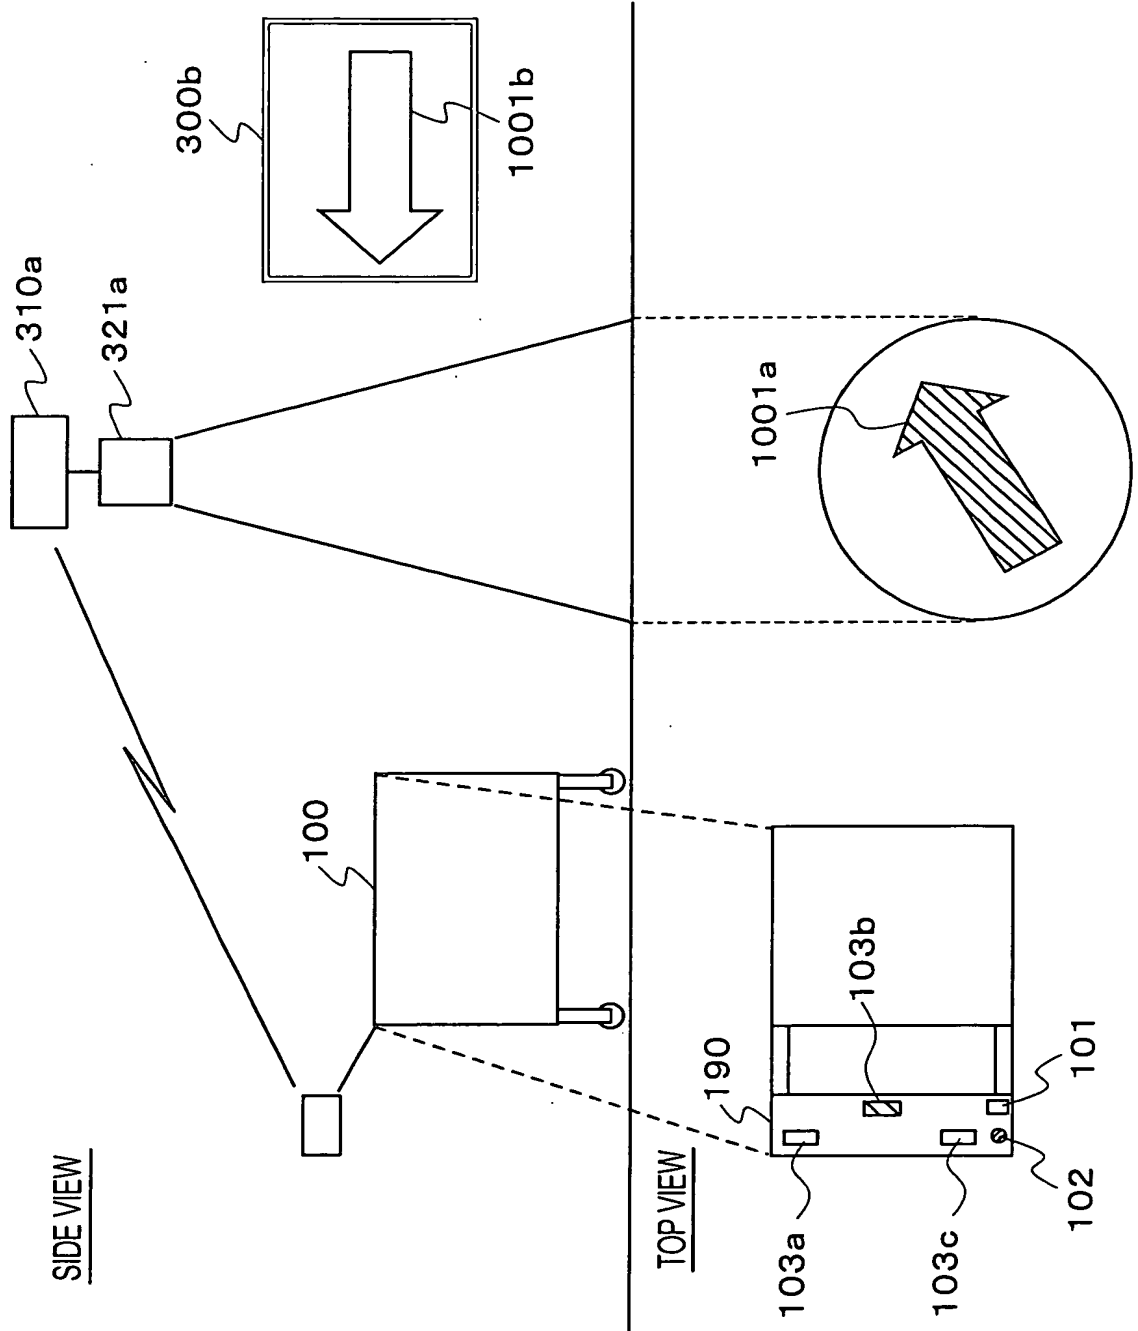


FIG.13

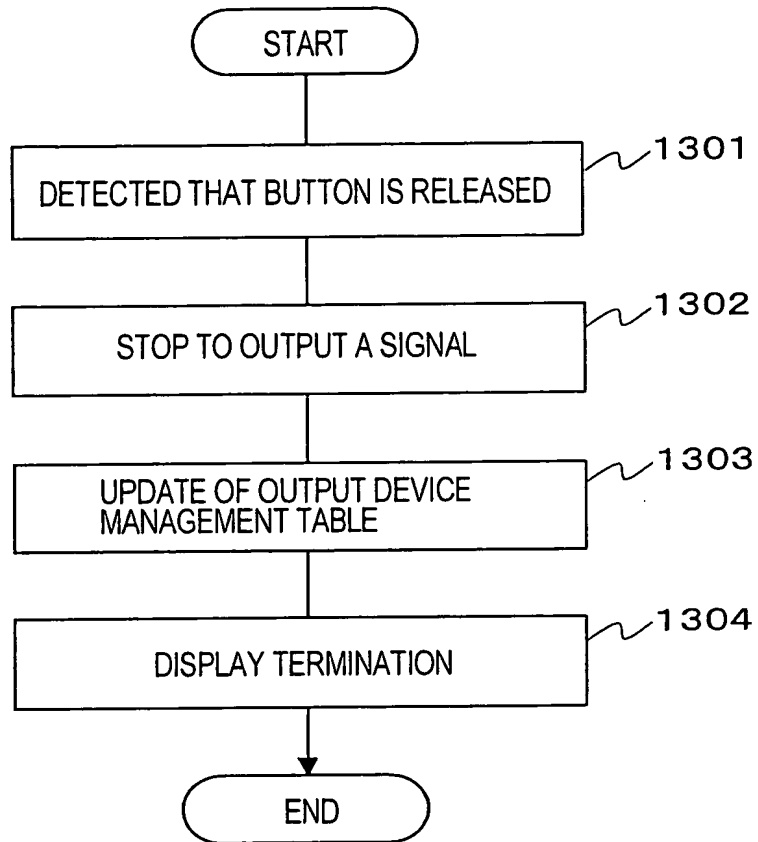


FIG.14

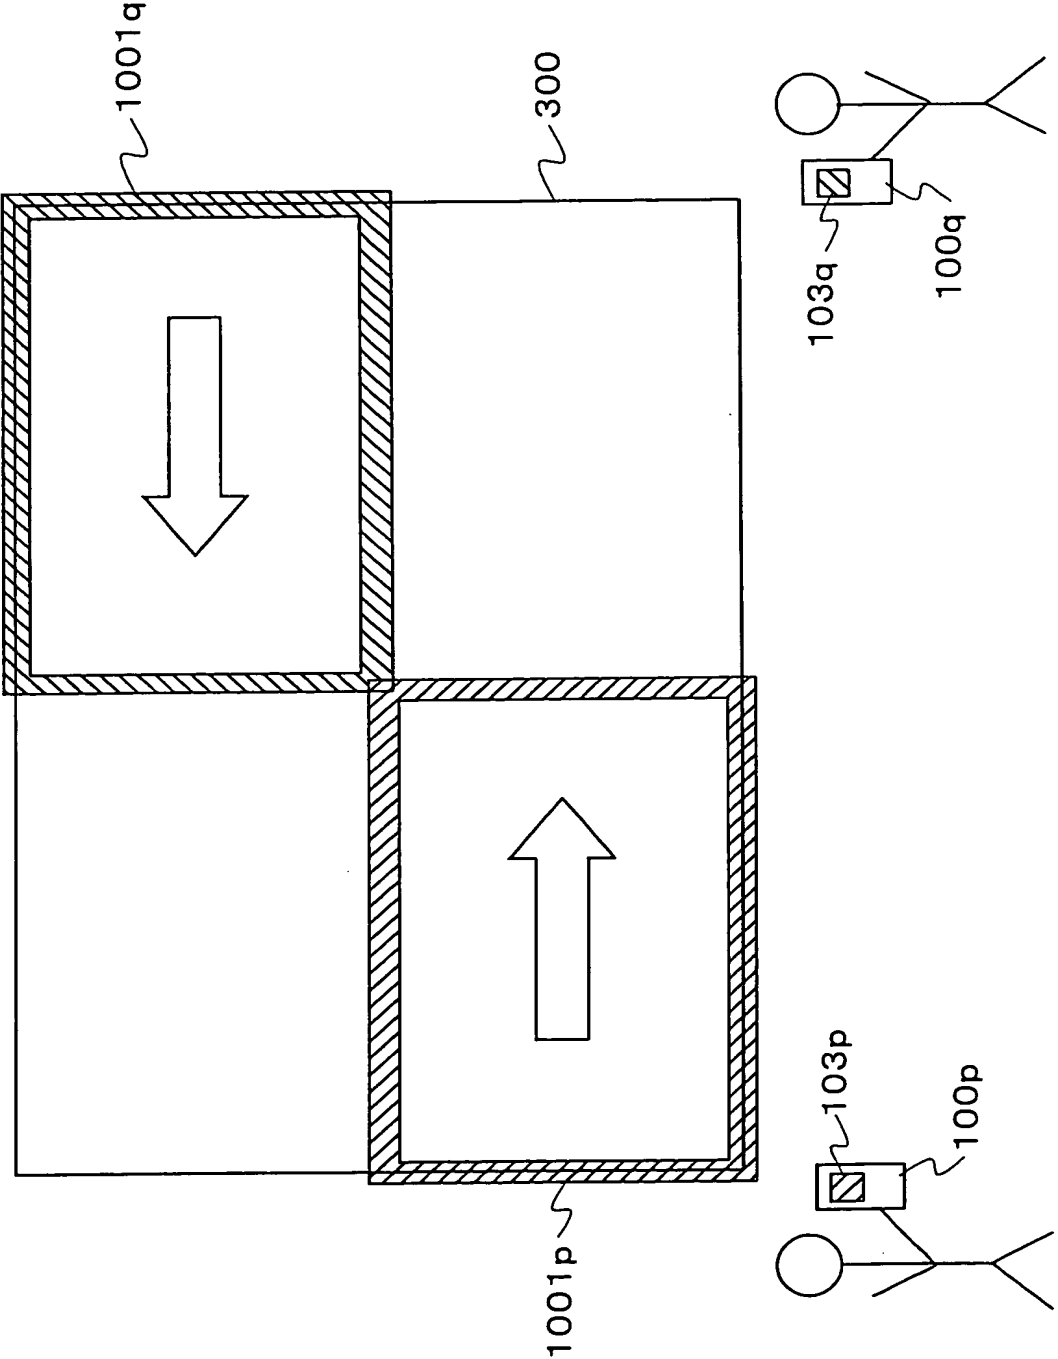


FIG.15

